



PREMIUM LIGHT QUALITY

Healthy & Comfortable Light




Premium
Light Quality



Edge-lit LED lighting creates bright and uniform illumination.
Soft Edge light gives comfort to eyes and delivers pleasant mood to space.




LED Edge-lit Technology

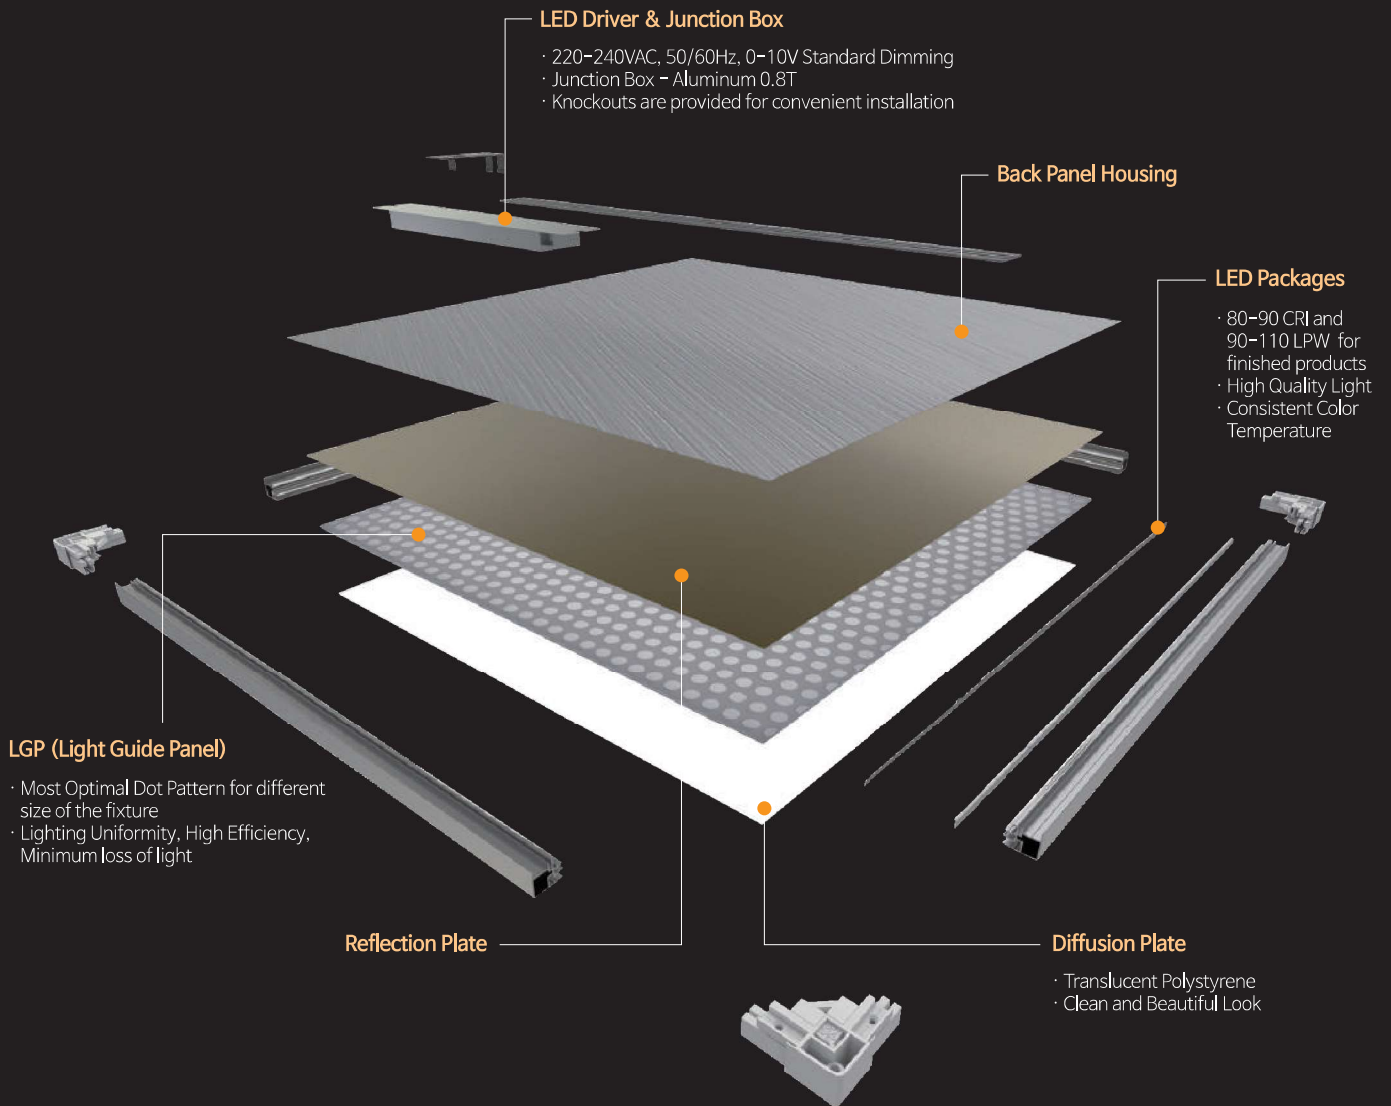

Light Guide Plate (LGP) Pattern Design Technology


- Illumination uniformity over 90%
- Sophisticated pattern design for light efficiency maximization
- Over 1,000 LGP pattern design

LGP Types

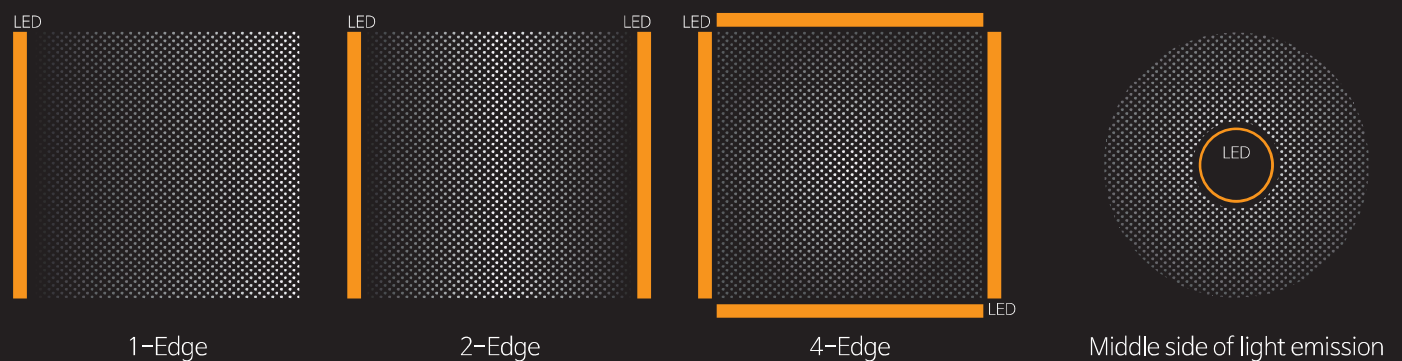

Frame Design Technology

Frame Structure

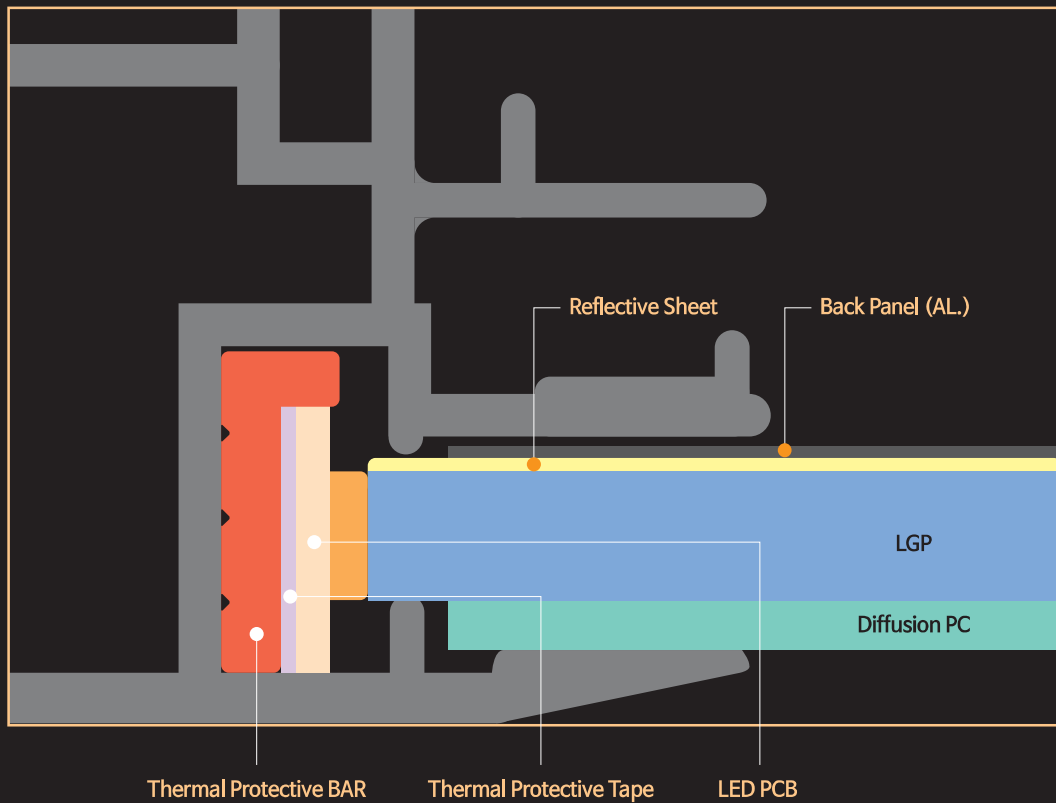

- Thermal protective bar installed inside frame
- Preventing dirt and insects from entering
- Optimized design for insulation between frames
- Bracket installation to prevent deformation
- Installable in one step without perforation
- Technical circuit design for thermal protection

01

DAYTIME Edge-lit Lighting

Recessed Luminaire

Emergency Luminaire

Surface Mounted Luminaire

Suspended Luminaire

02

DAYTIME Interior Lighting

Surface Mounted Luminaire

Suspended Luminaire

Recessed Luminaire

Recessed Sensor Luminaire






T BAR

SETB-3L012 / 4L012 / 5L012

LED 32W / 125lm/w / CRI>80


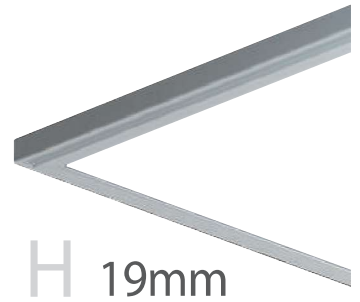


- EDGE-LIT** LED packages are adhered to sides of LGP.
- EVENLY-LIT** PMMA Light Guide Plate evenly spreads light to the center of luminaire.
- GLARE FREE** Soft light spreading from edge is easy on eyes.
- EASY TO INSTALL** Luminaire is directly installed on ceiling T-bar.
- SLIM DESIGN** Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.




ILLUMINATION


Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

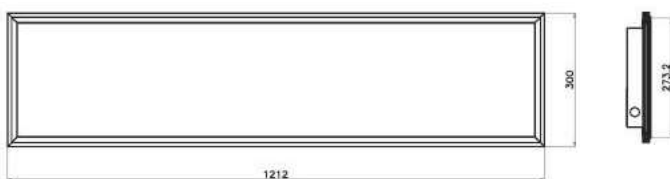

● Junction Box Type




Normal

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB3230L012O100	3,000	80	3,520	110	1212 / 300 / 19	4.68kg
SETB3240L012O100	4,000	80	4,000	125	1212 / 300 / 19	4.68kg
SETB3250L012O100	5,000	80	4,000	125	1212 / 300 / 19	4.68kg

T BAR

SETB-3L013 / 4L013 / 5L013

LED 32W / 125lm/w / CRI>80

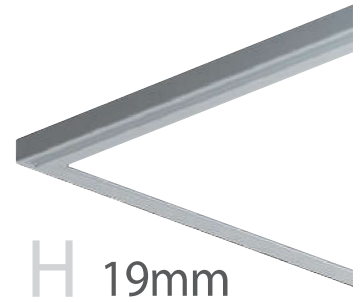

H 19mm





- EDGE-LIT** LED packages are adhered to sides of LGP.
- EVENLY-LIT** PMMA Light Guide Plate evenly spreads light to the center of luminaire.
- GLARE FREE** Soft light spreading from edge is easy on eyes.
- EASY TO INSTALL** Luminaire is directly installed on ceiling T-bar.
- SLIM DESIGN** Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.




ILLUMINATION


Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

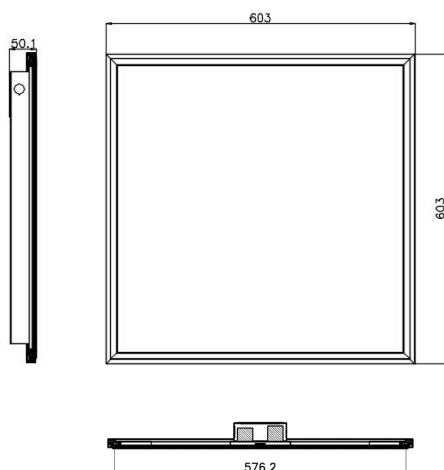

● Junction Box Type




Normal

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB3230L013O100	3,000	80	3,520	110	603 / 603 / 19	4.82kg
SETB3240L013O100	4,000	80	4,000	125	603 / 603 / 19	4.82kg
SETB3250L013O100	5,000	80	4,000	125	603 / 603 / 19	4.82kg

T BAR

SETB-3L014 / 4L014 / 5L014

LED 40W / 125lm/w / CRI>80

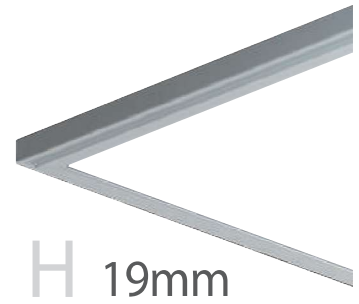

H 19mm

**EDGE-LIT**

LED packages are adhered to sides of LGP.

EVENLY-LIT



PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.

EASY TO INSTALL


Luminaire is directly installed on ceiling T-bar.

SLIM DESIGNExtra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.
ILLUMINATION
 Photometric Data


· Color Rendering Index: Ra > 80

· Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

● Junction Box Type




LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB4030L014O100	3,000	80	4,400	110	1212 / 603 / 19	8.44kg
SETB4040L014O100	4,000	80	5,000	125	1212 / 603 / 19	8.44kg
SETB4050L014O100	5,000	80	5,000	125	1212 / 603 / 19	8.44kg

Emergency T BAR

SETE-3L008 / 4L008 / 5L008

LED 32W / 125lm/w / CRI>80



EMERGENCY ILLUMINATION

Emergency battery enables 90 minutes illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.

EASY TO INSTALL


Luminaire is directly installed on ceiling T-bar.

SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.



● Junction Box Type





Emergency



ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE3230L008O100	3,000	80	3,520	110	1212 / 300 / 19	5.92kg
SETE3240L008O100	4,000	80	4,000	125	1212 / 300 / 19	5.92kg
SETE3250L008O100	5,000	80	4,000	125	1212 / 300 / 19	5.92kg

Emergency T BAR

SETE-3L009 / 4L009 / 5L009

LED 32W / 125lm/w / CRI>80

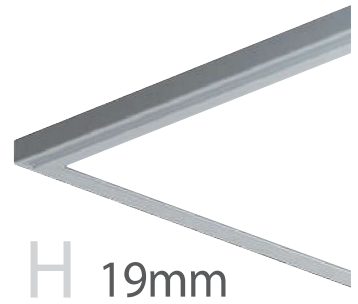

EMERGENCY ILLUMINATION

Emergency battery enables 90 minutes illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE


Soft light spreading from edge is easy on eyes.

EASY TO INSTALL


Luminaire is directly installed on ceiling T-bar.

SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.

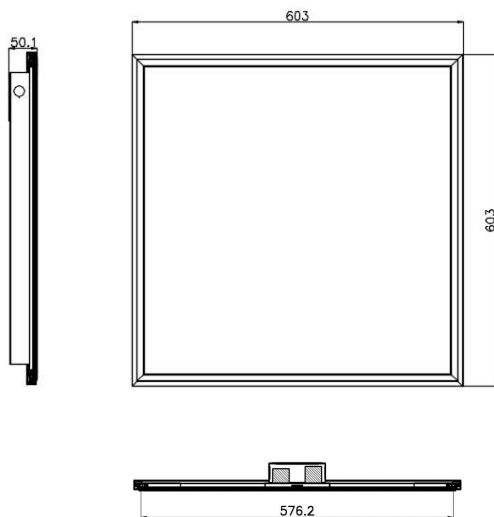

● Junction Box Type




Emergency



ILLUMINATION

Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE4530L003B100	3,000	80	3,520	110	603 / 603 / 19	6.06kg
SETE4530L003B100	4,000	80	4,000	125	603 / 603 / 19	6.06kg
SETE4550L003B100	5,000	80	4,000	125	603 / 603 / 19	6.06kg

Emergency T BAR

SETE-3L010 / 4L010 / 5L010

LED 40W / 125lm/w / CRI>80



EMERGENCY ILLUMINATION

Emergency battery enables 90 minutes illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE


Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.



SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.



ILLUMINATION


Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)



● Junction Box Type




Emergency

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE4030L010O100	3,000	80	4,400	110	1212 / 603 / 19	9.68kg
SETE4040L010O100	4,000	80	5,000	125	1212 / 603 / 19	9.68kg
SETE4050L010O100	5,000	80	5,000	125	1212 / 603 / 19	9.68kg

T BAR

SETB-L001

LED 36W / 110lm/w / CRI>80



EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE


Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.


SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.

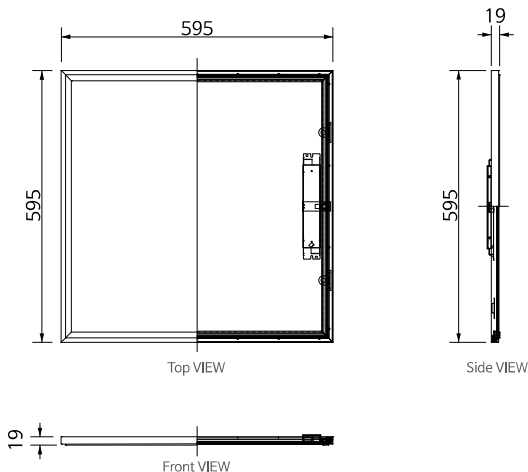

ILLUMINATION

Photometric Data

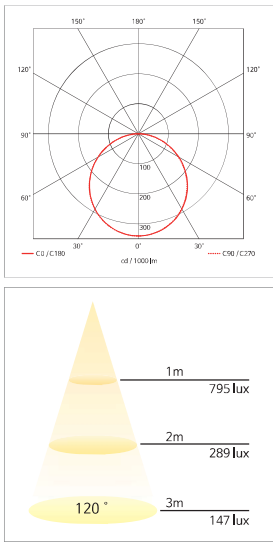


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB3630L001B100	3,000	80	3,240	99	595 / 595 / 19	3kg
SETB3640L001B100	4,000	80	3,960	110	595 / 595 / 19	3kg
SETB3650L001B100	5,000	80	3,960	110	595 / 595 / 19	3kg

T BAR

SETB-L002

LED 36W / 100lm/w / CRI>80

**EDGE-LIT**

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE



Soft light spreading from edge is easy on eyes.

EASY TO INSTALL


Luminaire is directly installed on ceiling T-bar.

SLIM DESIGNExtra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.**ILLUMINATION**

Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

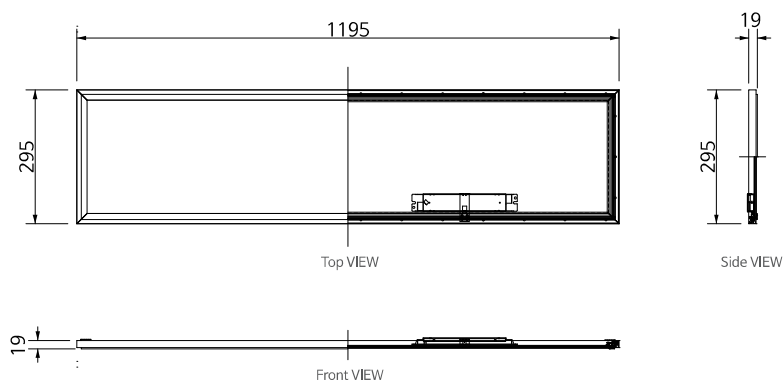

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB3630L002B100	3,000	80	3,240	90	1195 / 295 / 19	3.28kg
SETB3640L002B100	4,000	80	3,600	100	1195 / 295 / 19	3.28kg
SETB3650L002B100	5,000	80	3,600	100	1195 / 295 / 19	3.28kg



T BAR

SETB-L003

LED 45W / 110lm/w / CRI>80





- EDGE-LIT** LED packages are adhered to sides of LGP.
- EVENLY-LIT** PMMA Light Guide Plate evenly spreads light to the center of luminaire.
- GLARE FREE** Soft light spreading from edge is easy on eyes.
- EASY TO INSTALL** Luminaire is directly installed on ceiling T-bar.
- SLIM DESIGN** Extra slim design (H:19mm) is good for space saving. Back side is finished with aluminum 0.3T plate.

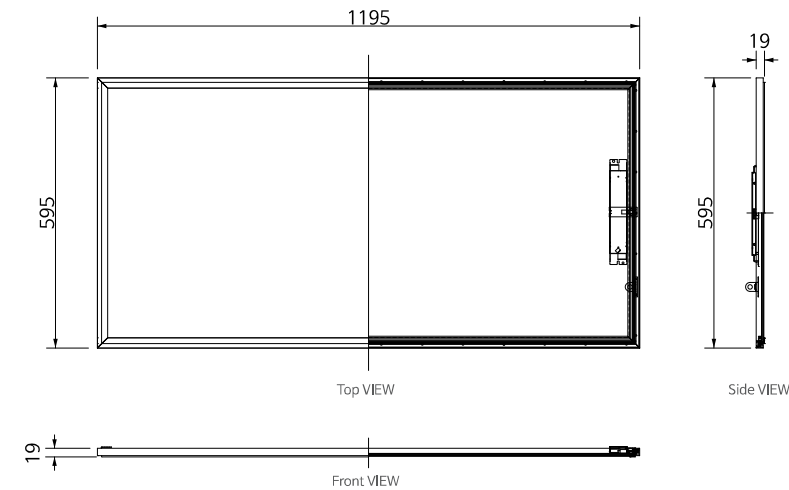

ILLUMINATION

Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETB4530L003B100	3,000	80	4,455	99	1195 / 595 / 19	5.58kg
SETB4540L003B100	4,000	80	4,950	110	1195 / 595 / 19	5.58kg
SETB4550L003B100	5,000	80	4,950	110	1195 / 595 / 19	5.58kg

Emergency T BAR

SETE-L001

LED 36W / 110lm/w / CRI>80



EMERGENCY ILLUMINATION

Emergency battery enables 1-3 hours illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE



Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.



SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.

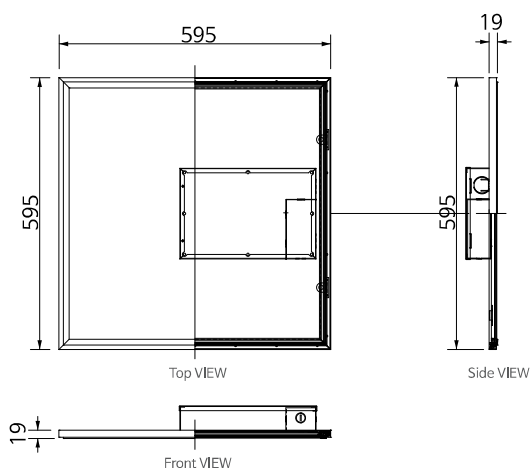

ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE3630L001B100	3,000	80	3,240	99	595 / 595 / 19	4.24kg
SETE3640L001B100	4,000	80	3,960	110	595 / 595 / 19	4.24kg
SETE3650L001B100	5,000	80	3,960	110	595 / 595 / 19	4.24kg

Emergency T BAR

SETE-L002

LED 36W / 100lm/w / CRI>80

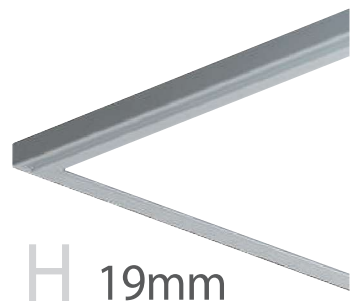

EMERGENCY ILLUMINATION

Emergency battery enables 1–3 hours illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.



SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.




ILLUMINATION

Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

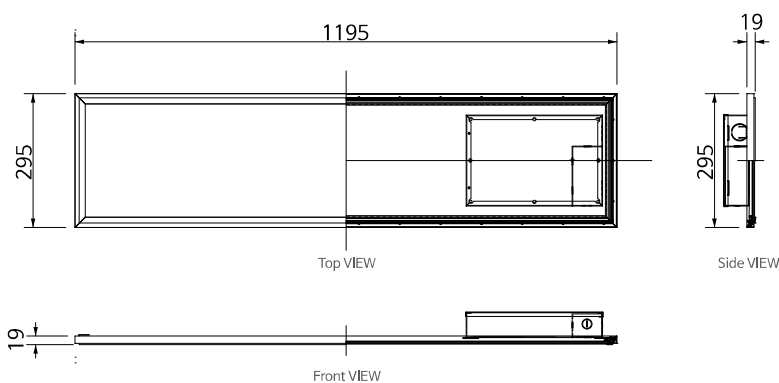

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE3630L002B100	3,000	80	3,240	90	1195 / 295 / 19	4.52kg
SETE3640L002B100	4,000	80	3,600	100	1195 / 295 / 19	4.52kg
SETE3650L002B100	5,000	80	3,600	100	1195 / 295 / 19	4.52kg

Emergency T BAR

SETE-L003

LED 45W / 110lm/w / CRI>80



EMERGENCY ILLUMINATION

Emergency battery enables 1-3 hours illumination during shut-down.

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE



Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.



SLIM DESIGN

Extra slim design (H:19mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.

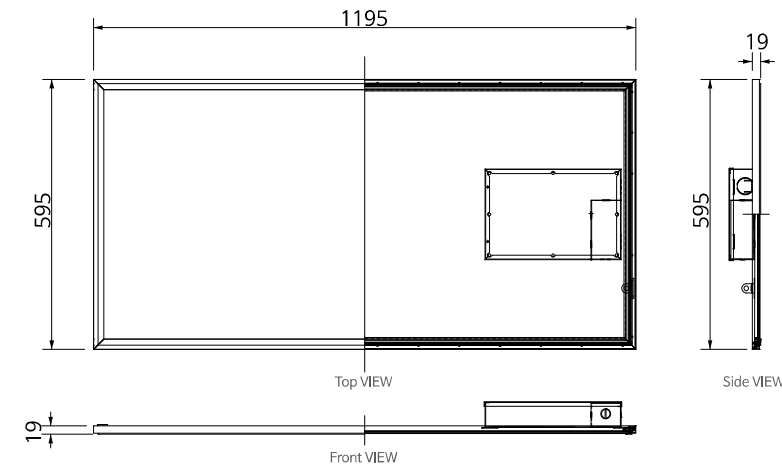

ILLUMINATION

Photometric Data



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SETE4530L003B100	3,000	80	4,455	99	1195 / 595 / 19	6.82kg
SETE4530L003B100	4,000	80	4,950	110	1195 / 595 / 19	6.82kg
SETE4550L003B100	5,000	80	4,950	110	1195 / 595 / 19	6.82kg

FLAT

SEEO-L001 / SEEO-L008


LED 36W / 110lm/w / CRI>80

LED 15W / 100lm/w / CRI>80


H 23mm



SEEO-L001

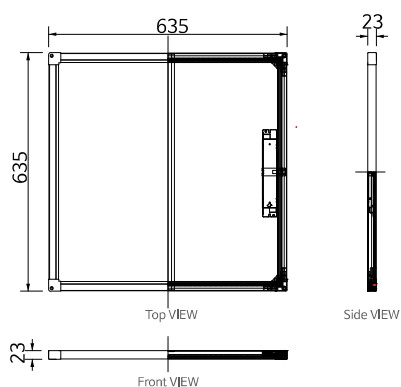

ILLUMINATION_Photometric Data

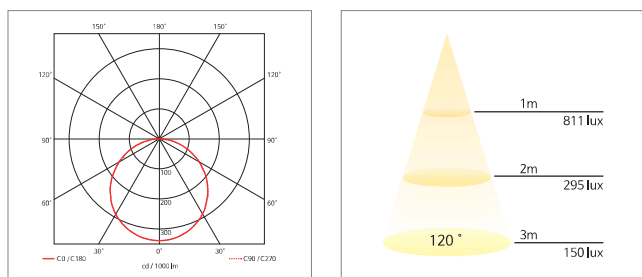

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.

SLIM DESIGN

Extra slim design (H:23mm) is good for space saving. Back side is finished with aluminum 0.3T plate.

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT (k)	CRI (Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEO3630L001B100	3,000	80	3,240	99	635 / 635 / 23	3.32kg
SEEO3640L001B100	4,000	80	3,960	110	635 / 635 / 23	3.32kg
SEEO3650L001B100	5,000	80	3,960	110	635 / 635 / 23	3.32kg
SEEO1530L008B100	3,000	80	1,350	90	320 / 320 / 23	1.38kg
SEEO1540L008B100	4,000	80	1,500	100	320 / 320 / 23	1.38kg
SEEO1550L008B100	5,000	80	1,500	100	320 / 320 / 23	1.38kg

FLAT


SEEO-L002 / SEEO-L003

LED 36W / 110lm/w / CRI>80
LED 25W / 100lm/w / CRI>80


H 23mm



SEEO-L002

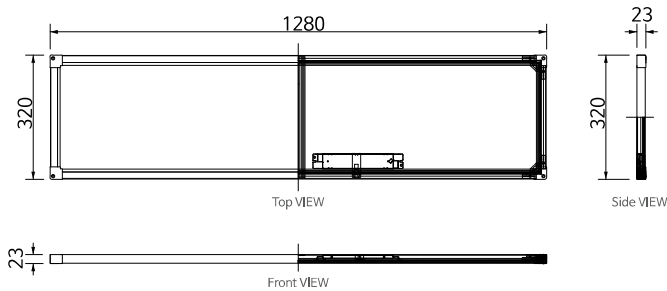

ILLUMINATION_Photometric Data

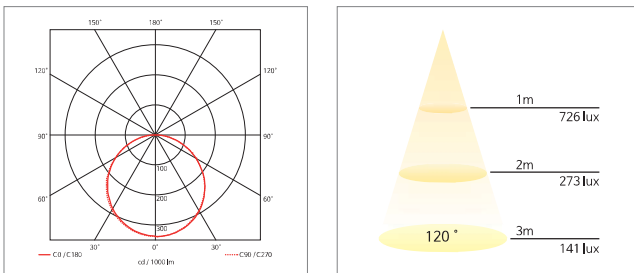

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.

SLIM DESIGN

Extra slim design (H:23mm) is good for space saving. Back side is finished with aluminum 0.3T plate.

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT (k)	CRI (Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEO3630L002B100	3,000	80	3,240	99	1280 / 320 / 23	3.5kg
SEEO3640L002B100	4,000	80	3,960	110	1280 / 320 / 23	3.5kg
SEEO3650L002B100	5,000	80	3,960	110	1280 / 320 / 23	3.5kg
SEEO2530L003B100	3,000	80	2,250	90	635 / 320 / 23	2.08kg
SEEO2540L003B100	4,000	80	2,500	100	635 / 320 / 23	2.08kg
SEEO2550L003B100	5,000	80	2,500	100	635 / 320 / 23	2.08kg

SLIM

SEEI-L001 / SEEI-L002

LED 36W / 110lm/w / CRI>80





H 31mm



SEEI-L001

SEEI-L002

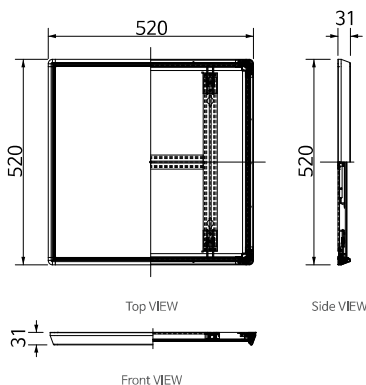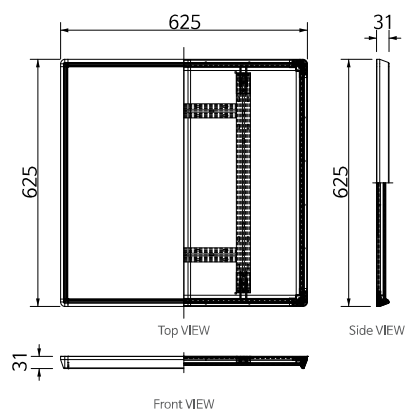

EDGE-LIT

LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE

Soft light spreading from edge is easy on eyes.


EASY TO INSTALL

Luminaire is directly installed on ceiling T-bar.

SLIM DESIGN

Extra slim design (H:31mm) is good for space saving. Back side is finished with aluminum 0.3T plate.

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEI3630L001B200	3,000	80	3,240	99	625 / 625 / 31	3.98kg
SEEI3640L001B200	4,000	80	3,960	110	625 / 625 / 31	3.98kg
SEEI3650L001B200	5,000	80	3,960	110	625 / 625 / 31	3.98kg
SEEI3630L002B200	3,000	80	3,240	99	520 / 520 / 31	3.08kg
SEEI3640L002B200	4,000	80	3,960	110	520 / 520 / 31	3.08kg
SEEI3650L002B200	5,000	80	3,960	110	520 / 520 / 31	3.08kg

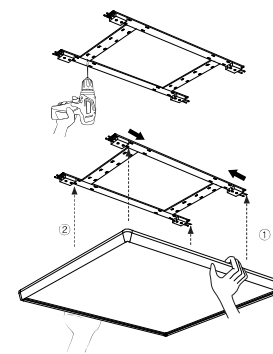

Installation Guide

1. Fix mounting kit on ceiling.
2. Lift cover on the skew and push spring 1 to fix one side.
3. Fix the other corner on spring 2.
4. Check the lighting is well installed and perfectly parallel to ceiling.

SLIM


SEEI-L001 / SEEI-L002

LED 36W / 110lm/w / CRI>80



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

ILLUMINATION


Photometric Data



SEEI-L001



SEEI-L002




SLIM

SEEI-L005

LED 36W / 110lm/w / CRI>80




- EDGE-LIT** LED packages are adhered to sides of LGP.
- EVENLY-LIT** PMMA Light Guide Plate evenly spreads light to the center of luminaire.
- GLARE FREE** Soft light spreading from edge is easy on eyes.
- EASY TO INSTALL** Luminaire is directly installed on ceiling T-bar.
- SLIM DESIGN** Extra slim design (H:31mm) is good for space saving. Back side is finished with aluminum 0.3T plate.

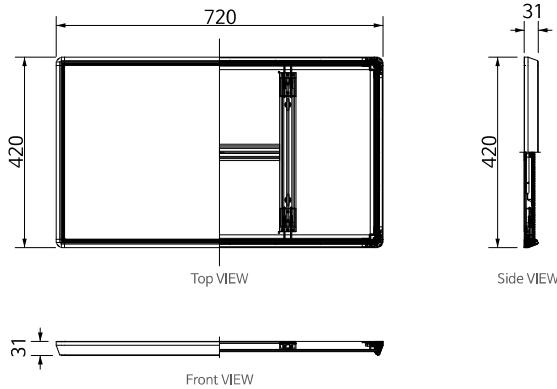

ILLUMINATION

Photometric Data

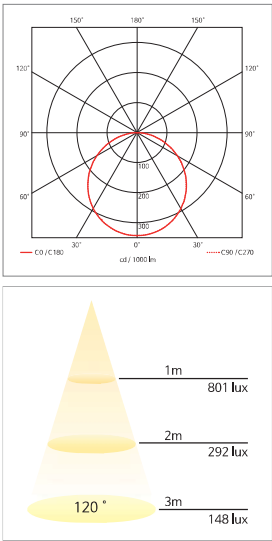

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)


LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEI3630L005B200	3,000	80	3,564	90	720 / 420 / 31	3.34kg
SEEI3640L005B200	4,000	80	3,960	110	720 / 420 / 31	3.34kg
SEEI3650L005B200	5,000	80	3,960	110	720 / 420 / 31	3.34kg

SLIM

SEEI-L005

LED 36W / 110lm/w / CRI>80

Slim Edge-lit luminaire makes room look more spacious and gives depth in space. Soft light adds a sensuous touch to space.

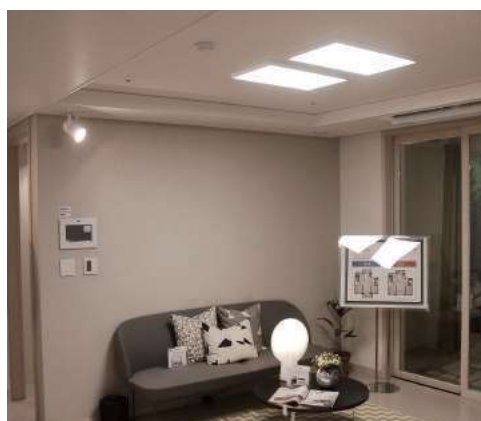

CIRCLE

SEEI-L003

LED 36W / 100lm/w / CRI>80

**EDGE-LIT**

LED packages are adhered to sides of LGP.

EVENLY-LIT


PMMA Light Guide Plate evenly spreads light to the center of luminaire.

GLARE FREE



Soft light spreading from edge is easy on eyes.

EASY TO INSTALL

LUMINAIRE is directly installed on ceiling surface

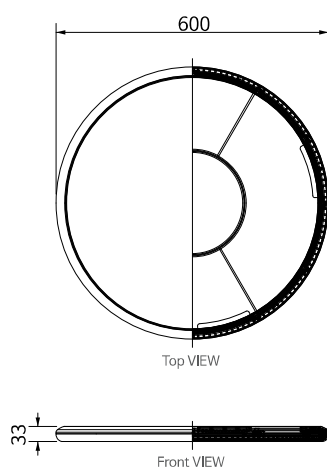SLIM DESIGNExtra slim design (H:33mm) is good for space saving.
Back side is finished with aluminum 0.3T plate.**ILLUMINATION**

Photometric Data



· Color Rendering Index: Ra > 80

· Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEI3630L003B300	3,000	80	3,240	90	600 / 33	3.72kg
SEEI3640L003B300	4,000	80	3,600	110	600 / 33	3.72kg
SEEI3650L003B300	5,000	80	3,600	110	600 / 33	3.72kg

CIRCLE

SEEI-L003

LED 36W / 100lm/w / CRI>80



Suspended Donuts

SEEP-L001

LED 21W / 74lm/w / CRI>80



EDGE-LIT



LED packages are adhered to sides of LGP.

EVENLY-LIT

PMMA Light Guide Plate evenly spreads light to the edge of luminaire.


GLARE FREE

Soft light spreading from inner circle is easy on eyes.

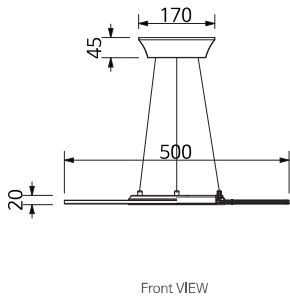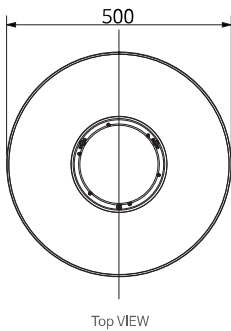

ILLUMINATION

Photometric Data

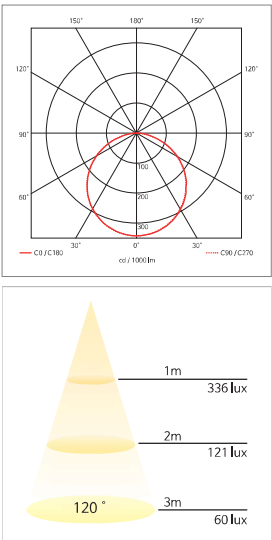


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEEP2130L001B100	3,000	80	1,398	66	500 / 20	1.98kg
SEEP2140L001B100	4,000	80	1,554	74	500 / 20	1.98kg
SEEP2150L001B100	5,000	80	1,554	74	500 / 20	1.98kg

Suspended Donuts

SEEP-L001


LED 21W / 74lm/w / CRI>80

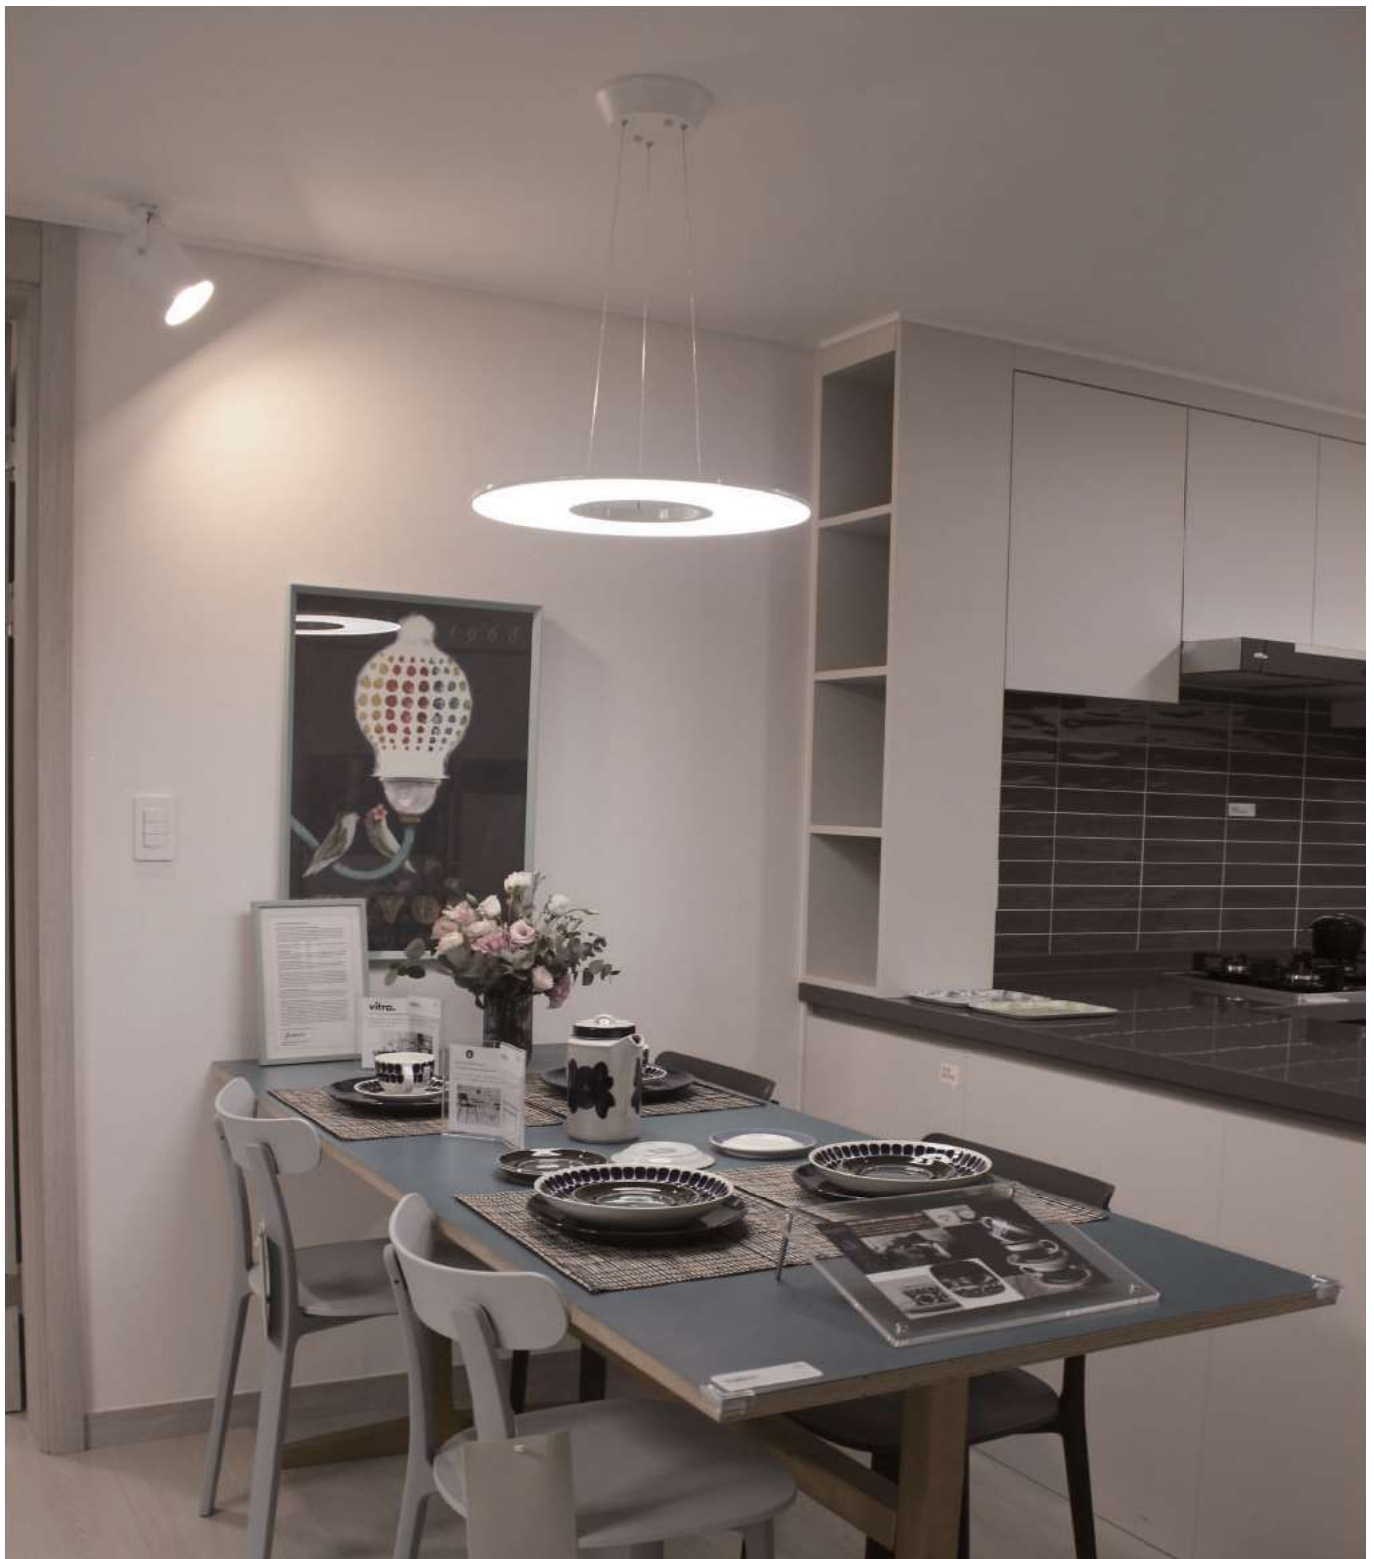

WAVE


SELL-L306

LED 34W / 90lm/w / CRI>80

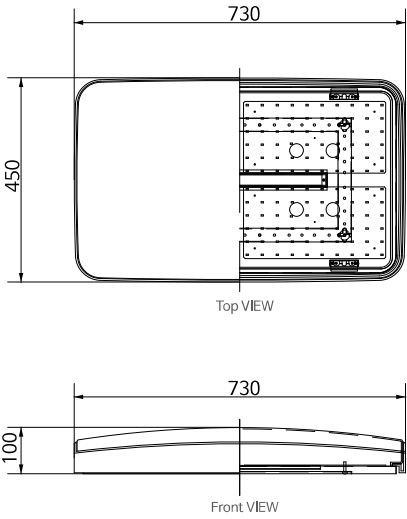

ILLUMINATION

Photometric Data

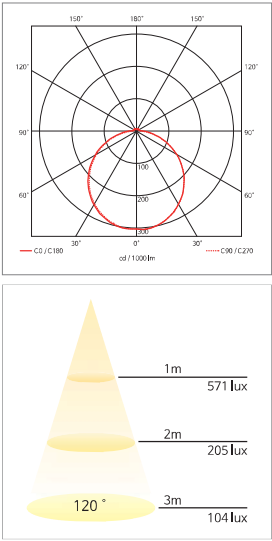

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic, PMMA

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SELL3430L306B200	3,000	80	2,754	81	730 / 450 / 100	5.5kg
SELL3440L306B200	4,000	80	3,060	90	730 / 450 / 100	5.5kg
SELL3450L306B200	5,000	80	3,060	90	730 / 450 / 100	5.5kg

WAVE

SELL-L306


LED 34W / 90lm/w / CRI>80



PLAIN


SELL-L262

LED 34W / 90lm/w / CRI>80

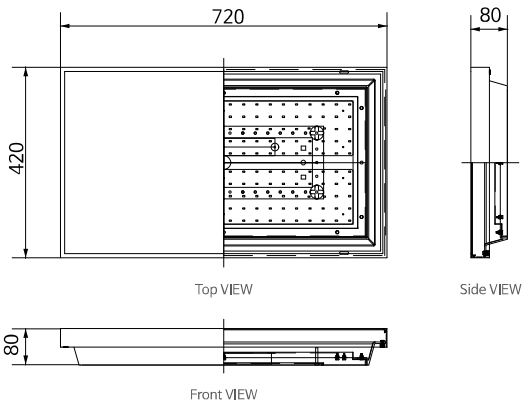

ILLUMINATION

Photometric Data

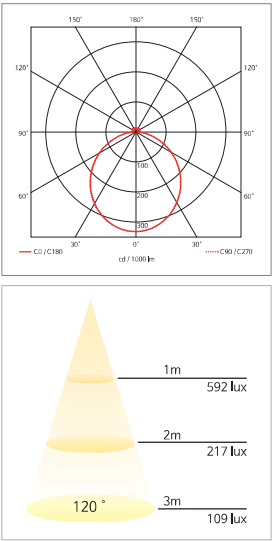

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic, AL, PC

LED luminaires	CCT (k)	CRI (Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SELL3430L262B300	3,000	80	2,754	81	720 / 420 / 85	4.4kg
SELL3440L262B300	4,000	80	3,060	90	720 / 420 / 85	4.4kg
SELL3450L262B300	5,000	80	3,060	90	720 / 420 / 85	4.4kg

PLAIN

SELL-L262


LED 34W / 90lm/w / CRI>80




WIND

SELL-L227

LED 34W / 90lm/w / CRI>80

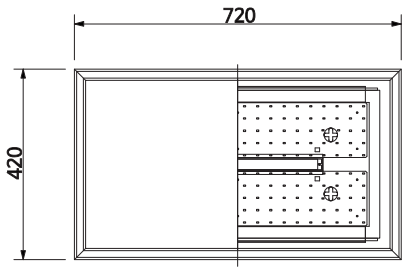



Top VIEW

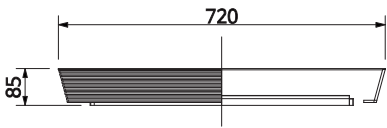

Front VIEW

ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SELL3430L227B200	3,000	80	2,754	81	720 / 420 / 90	5.1kg
SELL3440L227B200	4,000	80	3,060	90	720 / 420 / 90	5.1kg
SELL3450L227B200	5,000	80	3,060	90	720 / 420 / 90	5.1kg

WAVE


SERL-321

LED 40W / 90lm/w / CRI>80

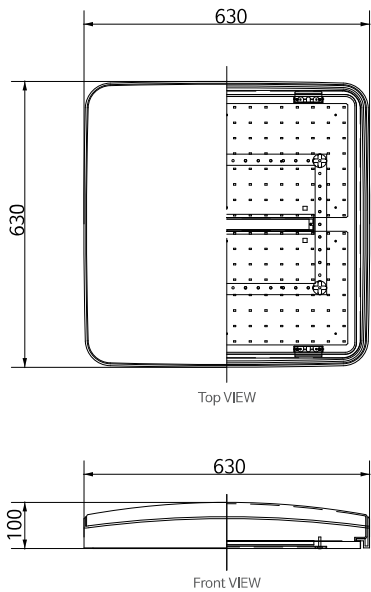

ILLUMINATION

Photometric Data

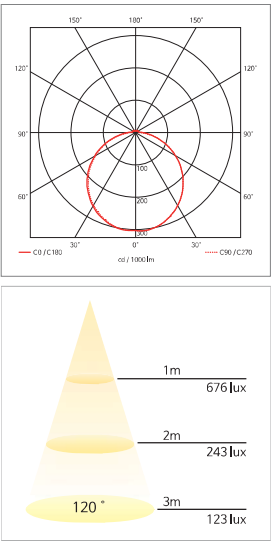


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic, PMMA

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SERL4030L321B200	3,000	80	3,240	81	630 / 630 / 100	5.5kg
SERL4040L321B200	4,000	80	3,600	90	630 / 630 / 100	5.5kg
SERL4050L321B200	5,000	80	3,600	90	630 / 630 / 100	5.5kg

PLAIN



SERL-L227

LED 40W / 90lm/w / CRI>80

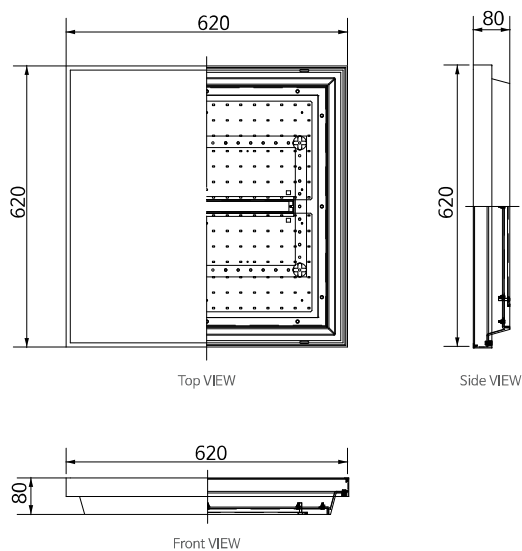

ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic, AL, PC

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SELL4030L262B300	3,000	80	3,240	81	720 / 420 / 85	4.4kg
SELL4040L262B300	4,000	80	3,600	90	720 / 420 / 85	4.4kg
SELL4050L262B300	5,000	80	3,600	90	720 / 420 / 85	4.4kg

WIND


SERL-L257

LED 40W / 90lm/w / CRI>80

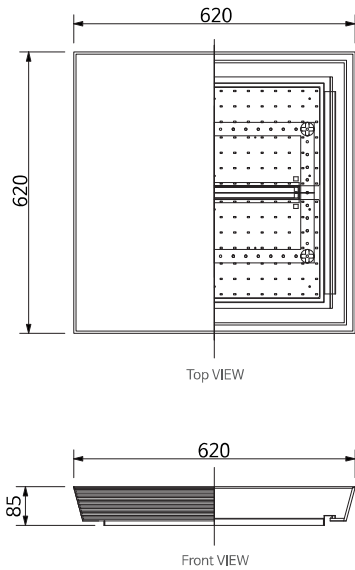

ILLUMINATION

Photometric Data

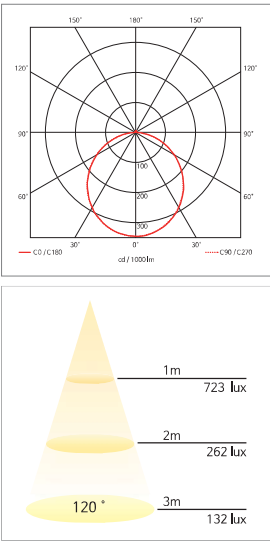


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SELL4030L227B200	3,000	80	3,240	81	620 / 620 / 90	5.5kg
SELL4040L227B200	4,000	80	3,600	90	620 / 620 / 90	5.5kg
SELL4050L227B200	5,000	80	3,600	90	620 / 620 / 90	5.5kg

SPACESHIP


SEPL-L269

LED 20W / 75lm/w / CRI>80

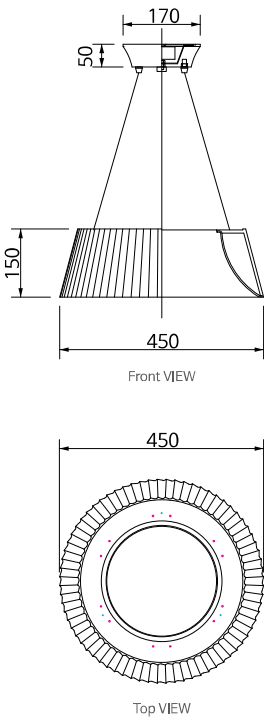

ILLUMINATION

Photometric Data

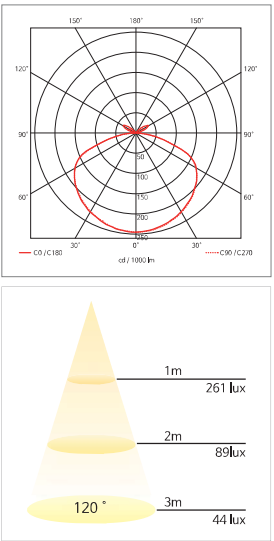

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover ABS, acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEPL2030L269B300	3,000	80	1,350	67	450 / 150	3.8kg
SEPL2040L269B300	4,000	80	1,500	75	450 / 150	3.8kg
SEPL2050L269B300	5,000	80	1,500	75	450 / 150	3.8kg

SPACESHIP

SEPL-L269



LED 20W / 75lm/w / CRI>80



SPACESHIP



SEPL-L284

LED 24W / 75lm/w / CRI>80

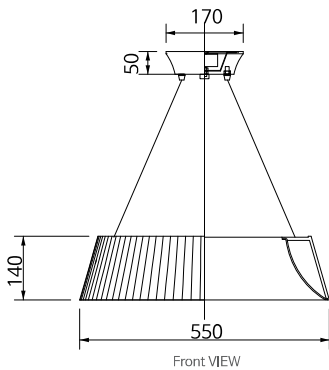

ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover ABS, acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEPL2430L284B300	3,000	80	1,620	67	550 / 140	3.9kg
SEPL2440L284B300	4,000	80	1,800	75	550 / 140	3.9kg
SEPL2450L284BB300	5,000	80	1,800	75	550 / 140	3.9kg

SPACESHIP


SEPL-L268

LED 32W / 75lm/w / CRI>80

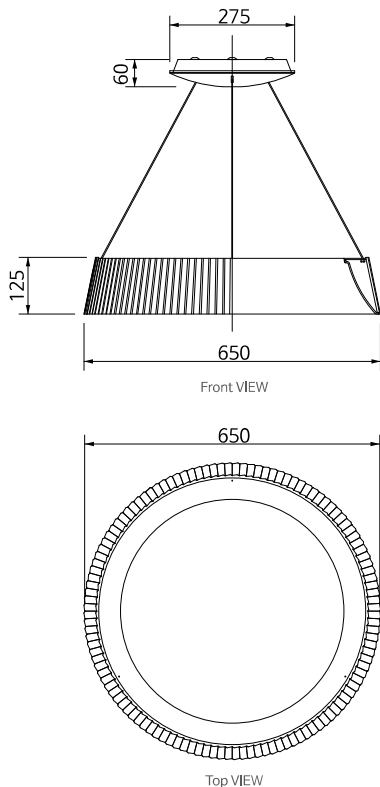

ILLUMINATION

Photometric Data

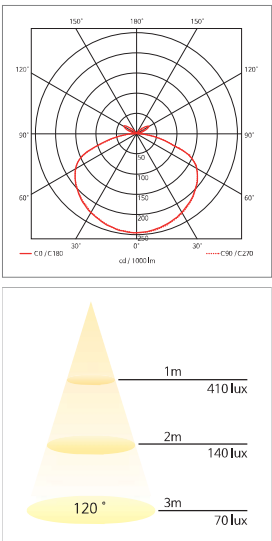



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover ABS, acrylic

LED luminaires	CCT (k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEPL3230L268B300	3,000	80	2,160	67	650 / 125	4.0kg
SEPL3240L268B300	4,000	80	2,400	75	650 / 125	4.0kg
SEPL3250L268B300	5,000	80	2,400	75	650 / 125	4.0kg

PLAIN


SEPL-L205

LED 21W / 75lm/w / CRI>80

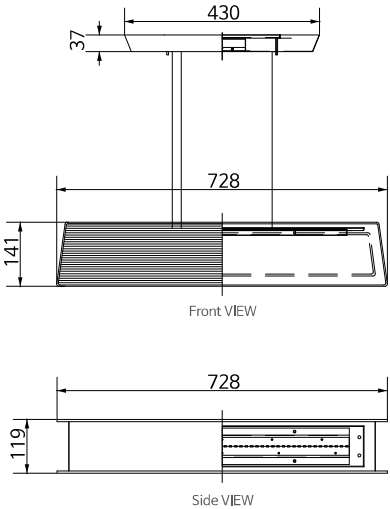

ILLUMINATION

Photometric Data

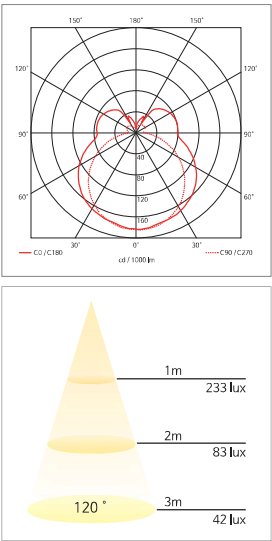




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT (k)	CRI (Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEPL2130L205B100	3,000	80	1,417	67	728 / 119 / 141	3.0kg
SEPL2140L205B100	4,000	80	1,575	75	728 / 119 / 141	3.0kg
SEPL2150L205B100	5,000	80	1,575	75	728 / 119 / 141	3.0kg

COCO


SEPL-L200

LED 24W / 85lm/w / CRI>80

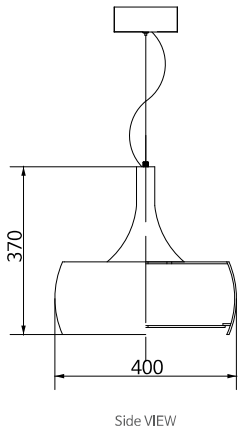

ILLUMINATION

Photometric Data

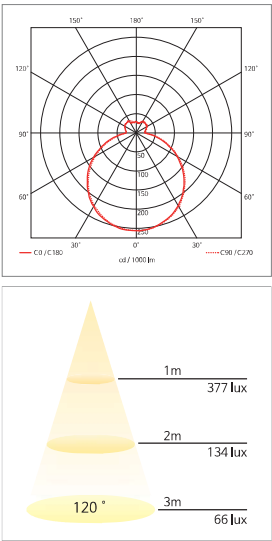


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SEPL2430L200B200	3,000	80	1,836	76	400 / 370	4.1kg
SEPL2440L200B200	4,000	80	2,040	85	400 / 370	4.1kg
SEPL2450L200B200	5,000	80	2,040	85	400 / 370	4.1kg

BELL

SEPL-L393

LED BULB 1EA (E-26)

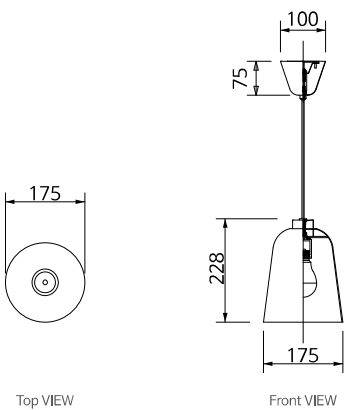

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
- Body steel

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SDPL0000L393D400	3,000	80	-	-	175 / 228	1kg

MILKY WAY

SEPL-L384 / 385 / 386

LED 60W / 52lm/w / CRI>80
LED 51W / 52lm/w / CRI>80
LED 20W / 52lm/w / CRI>80



Both lights on




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic
- Dimming / Color temperature changing



Upper light on



Lower light on

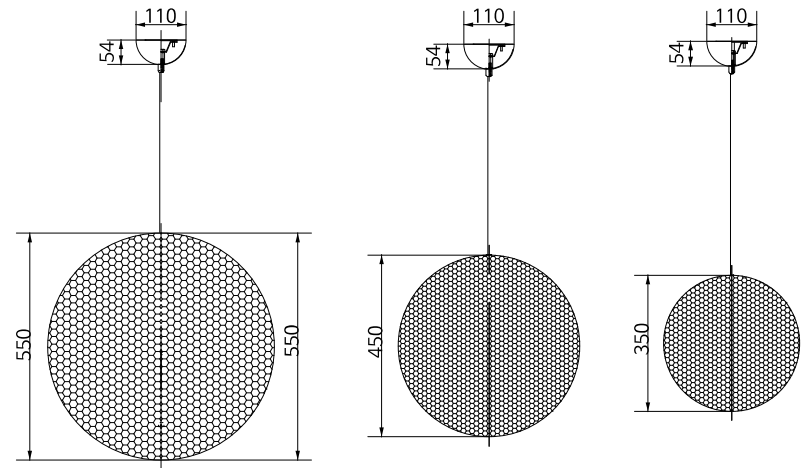


LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	W / H	kg
SEPL6040L384E100	4,000	80	3,120	51	550 / 550	6.5kg
SEPL5140L385E100	4,000	80	1,531	51	450 / 450	5.0kg
SEPL2040L386E100	4,000	80	1,021	51	350 / 350	4.0kg

RIPPLES

SEPL-L383 / SEPL-L394

LED BULB 5EA (E-17)
LED BULB 7EA (E-17)

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
- Body steel
- Cover acrylic

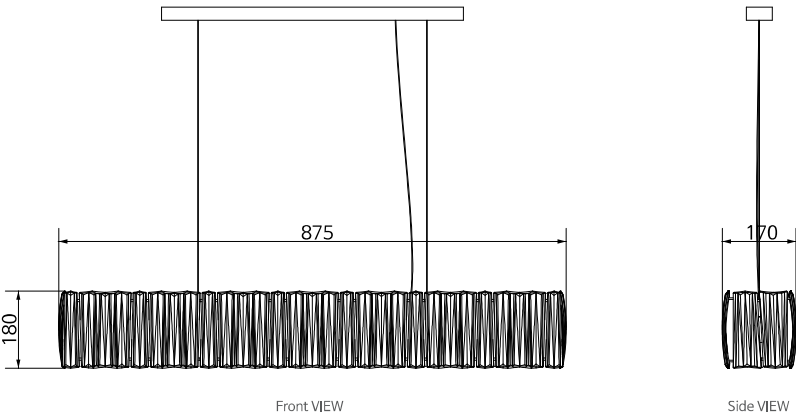


LED luminaires	CCT(k)	CRI(Ra)	LAMP	L / W / H	kg
SEPL0000L394C400	3,000	80	5	875 / 170 / 180	6.5kg
SEPL0000L383C400	3,000	80	7	1180 / 170 / 180	8.4kg

D-CIRCLE


SESL-L106

LED 12W / 90lm/w / CRI>80

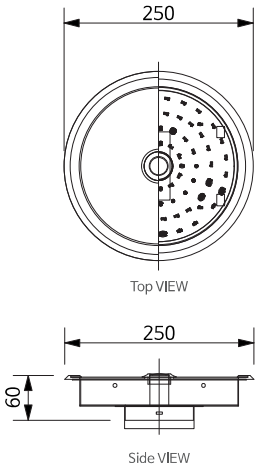

ILLUMINATION

Photometric Data

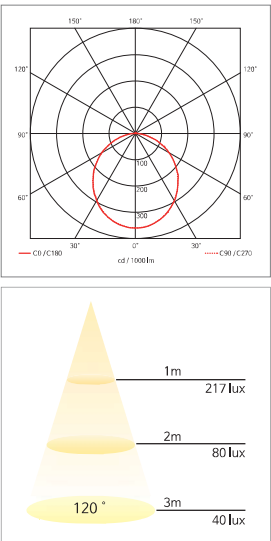



- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT (k)	CRI (Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SESL1230L106B100	3,000	80	972	81	250 / 60	1.3kg
SESL1240L106B100	4,000	80	1,080	90	250 / 60	1.3kg
SESL1250L106B100	5,000	80	1,080	90	250 / 60	1.3kg


CHARON

SESL-L129

LED 12W / 90lm/w / CRI>80





Top VIEW



Side VIEW

ILLUMINATION

Photometric Data





- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	L / W / H	kg
SESL1230L129B100	3,000	80	972	81	260 / 260 / 46	1.3kg
SESL1240L129B100	4,000	80	1,080	90	260 / 260 / 46	1.3kg
SESL1250L129B100	5,000	80	1,080	90	260 / 260 / 46	1.3kg


CONCH

SECL-L094

LED 9W (E26) / 34lm/w / CRI>80



Top VIEW





Side VIEW



ILLUMINATION

Photometric Data




- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover ABS, PC

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	W / H	kg
SECL0930L094C100	3,000	80	306	34	250 / 80	1.8kg
SECL0965L094C100	6,500	80	306	37	250 / 80	1.8kg

O-CIRCLE


SECL-L100

LED 9W (E26) / 34lm/w / CRI>80

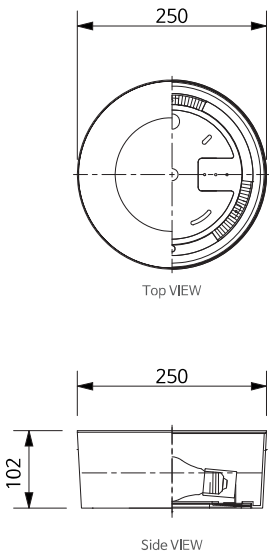

ILLUMINATION

Photometric Data

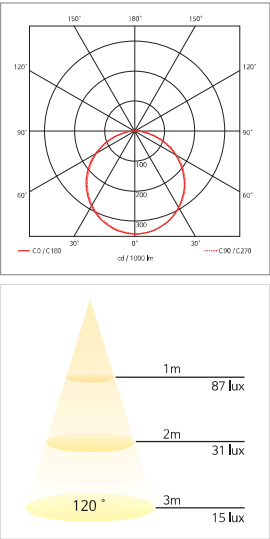


- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	W / H	kg
SECL0930L100C100	3,000	80	306	34	250 / 102	1.9kg
SECL0965L100C100	6,500	80	306	37	250 / 102	1.9kg

SMOOTHIE


SEDL-L102

LED 5W / 80lm/w / CRI>80

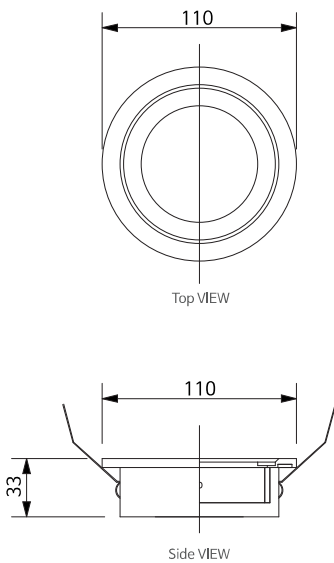

ILLUMINATION

Photometric Data

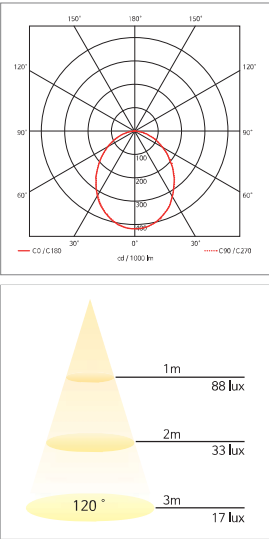

- Color Rendering Index: Ra > 80
- Color temperature: 3000 K (warm)
4000 K (warm white)
5000 K (white)
- Body steel, AL
- Cover acrylic

LED luminaires	CCT(k)	CRI(Ra)	Flux (lm)	efficacy (lm/w)	W / H	kg
SEDL0530L102B200	3,000	80	360	72	110 / 33	0.26kg
SEDL0540L102B200	4,000	80	400	80	110 / 33	0.26kg
SEDL0550L102B200	5,000	80	400	80	110 / 33	0.26kg

Company Profile



Company Name	Solux Co., LTD
Date of Foundation	July 04, 1996
Location	- Headquarter: Seoul, Magok 1st Factory: Gangwon-do Wonju-si 2nd Factory: Chungchungnam-do Gongju-si
Business Type	Lighting manufacturing, design
Major clients	Daewoo POSCO Hyundai ENG SK E&C etc



Headquarter in Seoul



Gongju Factory



Wonju Factory

Production Facilities

Wonju Factory



Gongju Factory



Project Portfolio

Trusted products, Enhancing the quality of life, Contributing to happiness

- ✓ The **largest** lighting production facilities in Korea (Wonju factory, Gongju factory)
- ✓ The **largest** number of contracts with major construction companies
- ✓ **Diversified** project portfolio (Hotel, Department store, Shopping mall, Hospital, Apartment)



Hannam The Hill



The Plaza Hotel



63 Building



Seoul Forest Galleria Forest



Seoul Forest Trimage



Yongsan Hotel



Yongsan City Park



Naver Headquarter



SK chemicals

Project Portfolio



Naver Office



SK chemicals



SK chemicals



Ahn Lab office


Project Portfolio



DAEWOO E&C JUNGdong CENTRAL PRugio



DAEWOO E&C PRugio

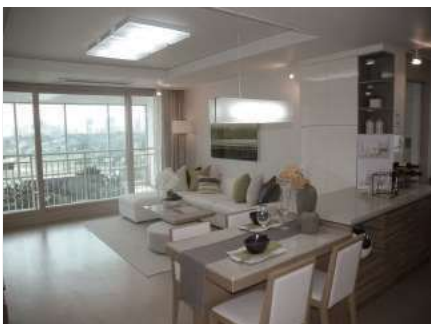

KUMHO E&C Gwangju Punghyang



KUMHO E&C Kunsan Naun

Overseas Project Portfolio



Highvill Park, Kazakhstan



Bismayah New City, Iraq



Ministry of Foreign Affairs, Vietnam



Embassy of the Republic of Korea, UAE



Samsung Electronics Yen binh Factory, Vietnam